PC Cable World™

LC-LC SM DUPLEX 9/125 FIBER OPTICAL CABLE

SKUS

LC-LC01SD	(1’)	LC-LC33SD	(33’)
LC-LC03SD	(3’)	LC-LC50SD	(50’)
LC-LC06SD	(6’)	LC-LC75SD	(75’)
LC-LC10SD	(10’)	LC-LC100SD	(100’)
LC-LC15SD	(15’)	LC-LC150SD	(150’)
LC-LC25SD	(25’)	LC-LC200SD	(200’)

FEATURES

- LCLC Single-Mode Duplex Cable 9/125µm
- Use for transmitting gigabit data signals for telecommunications, such as local area networks or fiber to home applications
- Capable of greater speeds and distances than multi-mode cable
- Has low insertion loss, low back reflection loss, and isn’t subjected to electromagnetic effects such as cross-talk or external interference
- Contains two fibers, supporting the flow of data in two directions
- Made with high quality Corning glass fiber core for durability and lower attenuation
- Snap-in Lucent Connectors (LC) fit within smaller spaces than SC connectors, and are commonly used for situations with packed connectors or with GBICs
- Premium grade ceramic ferrules with polished contacts to ensure optimal performance

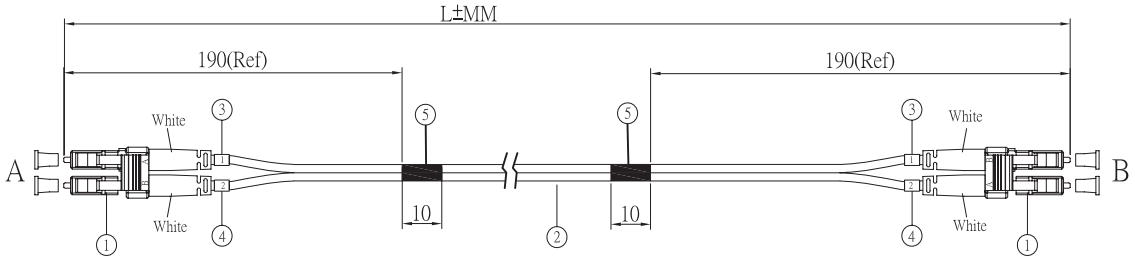

MATERIALS

(1) **CONN A/B**	LC duplex conn/UPC
(2) **CABLE**	Corning optical fiber cable 9/125 SM OFNR (UL) MM/YY XXXXXM, Yellow
(3) **MARKER RING 1**	L=3.7mm, ***Colour:*** White, Print 1, ***Text colour:*** Black
(4) **MARKER RING 2**	L=3.7mm, ***Colour:*** White, Print 2, ***Text colour:*** Black
(5) **H.S. TUBE**	Heat shrinking tube, Black, ID=3mm, L=10mm

LENGTH TABLE

1FT	304±10mm	**33FT**	10032±100mm
3FT	914±20mm	**50FT**	15240±100mm
6FT	1824±30mm	**75FT**	22860±200mm
10FT	3048±50mm	**100FT**	30480±200mm
15FT	4572±50mm	**150FT**	45720±200mm
25FT	7620±50mm	**200FT**	60960±250mm

SPECIFICATIONS

TIA/EIA-568B.3 | BELLCORE GR-020 | UL OFNR/FT4 STANDARD		**INSERTION LOSS**	≤ 0.3 dB
OPERATION TEMPERATURE	-20 — +70 Degrees Celsius	**RETURN LOSS**	≥ 35 dB
STORAGE TEMPERATURE	-40 — +70 Degrees Celsius	**MINI BENDING RADIUS**	6cm (Loaded) 3cm (Unloaded)
TOLERANCE	.X ± 0.3 | .XX ± 0.1 | .XXX ± 0.05		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com