


CAT5E GREY F/UTP SHIELDED NETWORK PATCH CABLE

SKUS	PP-701	(1.5')	PP-725	(25')
	PP-703	(3')	PP-750	(50')
	PP-706	(6')	PP-775	(75')
	PP-710	(10')	PP-7100	(100')
	PP-715	(15')		

FEATURES


- Category 5E 4-Pair F/UTP Stranded Shielded Copper Network Cable 26 AWG
- Use for voice, data, video distribution, and security applications requiring shielding
- Molded, snag-less boot prevents unwanted cable snags during installation and provides extra strain relief
- Shielded with aluminum polyester tape and drain wire to protect data signal integrity from EMI/RFI
- Ethernet 1000 BASE-T; 100 BASE-TX; 10 BASE-T (IEEE 802.3)
- Meets or exceeds all Cat5E TIA/EIA standards, TSB 568B TIA/ EIA Certified
- Enhanced 350MHz bandwidth for intensive applications
- 50 micron gold-plated copper alloy contact, shielded RJ45 8P8C modular plug
- FT4 rating for in-wall use

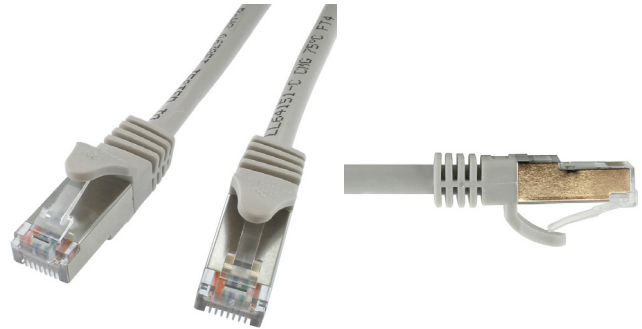

AVAILABLE COLOUR

Pin Assignment:

Pos. No.	T568B WIRING (PC TO HUB)	Pos. No.
1	Orange	1
2	White/Orange	2
3	Green	3
6	White/Green	6
4	White/Blue	4
5	Blue	5
7	Brown	7
8	White/Brown	8
Shell	Drain Wire	Shell

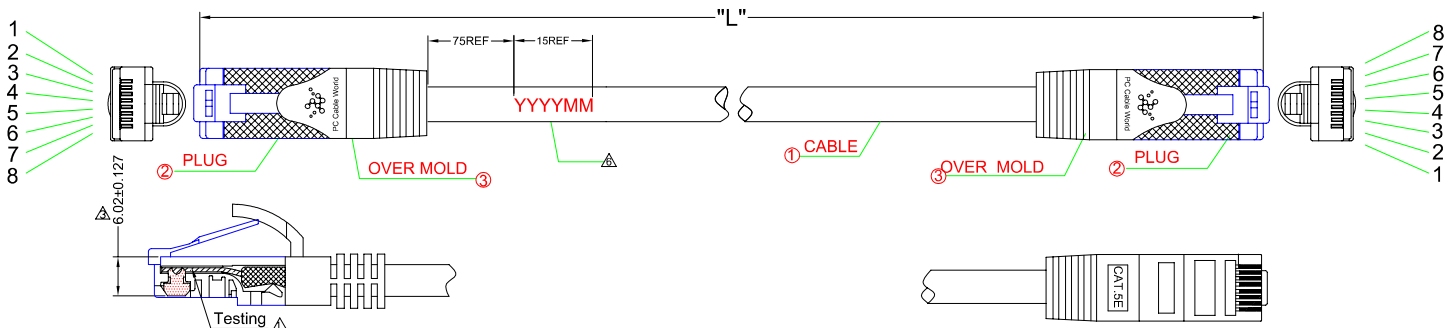

MATERIALS

CABLE (1)	Cat5e FTP 26AWG*4 pairs LAN Stranded cable
JACKET	PVC Light Grey (OD 5.6 ± 0.2 mm)
PLUG (2)	RJ-45 8P8C Modular short shielded plug Contact: Copper alloy 50 Micro-inches, Gold plated Insulator: Polycarbonate, UL94V-2
OVER MOLD (3)	PVC, Shore A: 75±3 Colour: Light Grey

SPECIFICATIONS

MEETS C5E EIA/TIA 568A/B STANDARD | ROHS COMPLIANT

SKUS	LENGTH	SKUS	LENGTH
PP-701	1.5' (457mm±20mm)	PP-725	25' (7620mm±50mm)
PP-703	3' (914mm±20mm)	PP-750	50' (15420mm±100mm)
PP-706	6' (1829mm±30mm)	PP-775	75' (22860mm±200mm)
PP-710	10' (3048mm±50mm)	PP-7100	100' (30480mm±200mm)
PP-715	15' (4572mm±50mm)		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com