

HDMI TO DVI-D SINGLE-LINK M/M CABLE



SKUS	VC-152S	(3')	VC-152T	(25')
	VC-152G	(6')	VC-152V	(33')
	VC-152L	(10')	VC-152X	(50')
	VC-152E	(15')		

FEATURES

- HDMI to DVI-D Single-Link 24-28AWG FT4 cable
- Use to interface between a digital source and any HDMI-enabled source, such as a set-top box, DVD player, or A/V receiver
- Gold dual-link DVI-D connectors for the highest quality digital signal
- FT4/CMG rating for in-wall use




AVAILABLE COLOUR

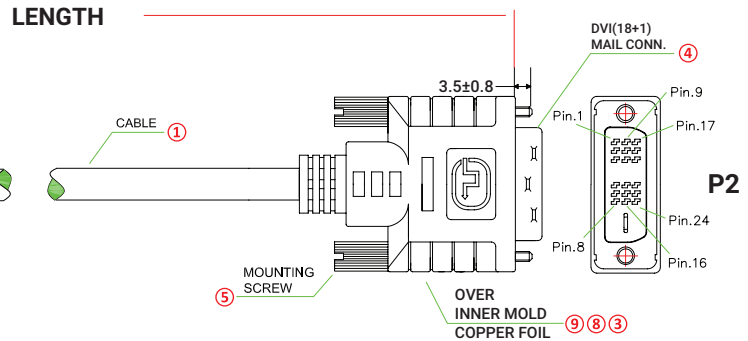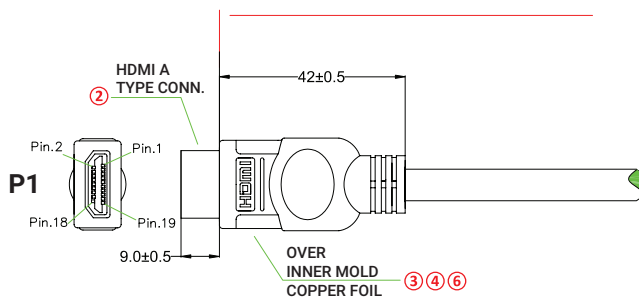

MATERIALS

CABLE (1)	<p>CABLE <1> {28AWG(7/0.127)x1P+1TG)x4 + 28AWG(7/0.127) x1P + 28AWG(7/0.127)*3C + AEB 85% Jacket: Black (OD 7.0 ± 0.2 mm) CMG / FT4</p> <p>CABLE <2> {24AWG(7/0.20T)x1P+1TG)x4 + 24AWG(7/0.20T) x1P + 24AWG(7/0.20T)*3C + AEB 85% Jacket: Black (OD 9.0 ± 0.2 mm) CMG / FT4</p>
HDMI A TYPE CONN. (2)	<p>19 pin male solder type Contact: Copper alloy with gold flash Insulator: Thermoplastic UL94V-0, metal shielding with gold plating</p>
OVER MOLD (3)	<p>PVC 34P, UL94V-0 Colour: Black</p>
DVI(18+1) MALE CONN. (4)	<p>18+1 pin male Contact: Copper alloy with gold flash Insulator: Thermoplastic UL94V-0, metal shielding with gold plating</p>
MOUNTING SCREW (5)	<p>#4-40UNC nickel plated Knob: Black PVC over mold</p>
HDMI CAP (6)	TPE cap
DVI CAP (7)	TPE cap
INNER MOLD (8)	<p>PE inner mold Colour: Natural</p>
COPPER FOIL (9)	Copper foil soldered



SPECIFICATIONS

ROHS COMPLIANT		
SKUS	LENGTH	CABLE
VC-152S	3' (914mm±30mm)	CABLE <1>
VC-152G	6' (1829mm±30mm)	
VC-152L	10' (3048mm±50mm)	
VC-152E	15' (4572mm±50mm)	
VC-152T	25' (7620mm±50mm)	
VC-152V	33' (10058mm±100mm)	CABLE <2>
VC-152X	50' (15240mm±100mm)	

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for a current specs. Please note that all physical specifications are nominal.