


# CAT6 GREY F/UTP SHIELDED NETWORK PATCH CABLE

<b>SKUS</b>	CC-701	(1.5')	CC-715	(15')
	CC-703	(3')	CC-725	(25')
	CC-706	(6')	CC-750	(50')
	CC-710	(10')		

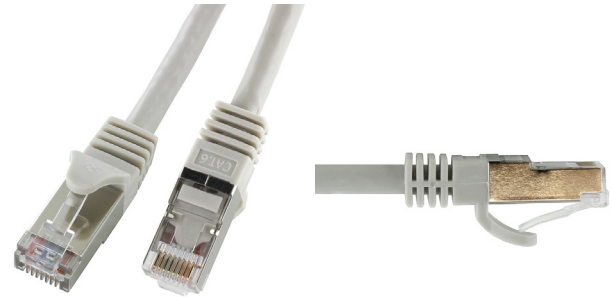

## FEATURES


- Applications: Data, voice, video distribution, security
- Category 6, Meets and/or Exceeds EIA/TIA 568 C.2-1
- Tested for applications up to 550MHz
- Shielding: Aluminum/polyester tape, stranded 26AWG tinned copper drain
- Molded boot to prevent snags and to provide strain relief
- 50 micron gold plated RJ-45 connector
- UL CM & CSA CMG Certification
- FT4 (in-wall)
- RoHS compliant
- Ethernet 10BASE-T, 100BASE-TX, 1000BASE-T
- Maximum Ethernet segment length: 100m (300ft)

## AVAILABLE COLOUR



### Pin Assignment:

Pos. No.	T568B WIRING (PC TO HUB)	Pos. No.
1	Orange	1
2	White/Orange	2
3	Green	3
6	White/Green	6
4	White/Blue	4
5	Blue	5
7	Brown	7
8	White/Brown	8
Shell	Drain Wire	Shell

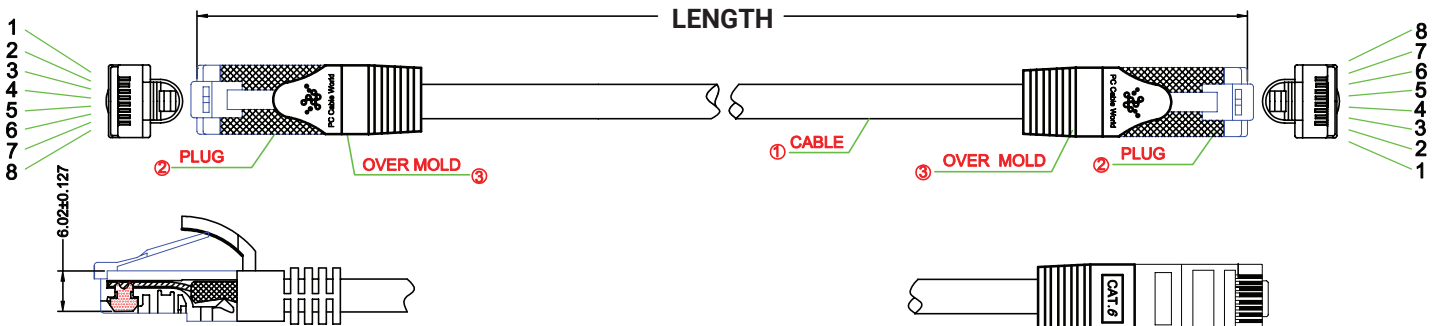

## MATERIALS

<b>CABLE (1)</b>	Cat6 UTP 26AWG*4 pairs + AE stranded cable
<b>JACKET</b>	PVC Grey (OD 6.0 ± 0.2 mm)
<b>PLUG (2)</b>	RJ-45 8P8C Modular short shielded plug <b>Contact:</b> Copper alloy 50 Micro-inches, gold plated <b>Insulator:</b> Polycarbonate, UL94V-2
<b>OVER MOLD (3)</b>	PVC, Shore A: 75±3 <b>Colour:</b> Grey

## SPECIFICATIONS

MEETS C6 EIA/TIA 568 C.2-1   ROHS COMPLIANT			
SKUS	LENGTH	SKUS	LENGTH
CC-701	1.5' (457mm±20mm)	CC-715	15' (4572mm±50mm)
CC-703	3' (914mm±20mm)	CC-725	25' (7620mm±50mm)
CC-706	6' (1829mm±30mm)	CC-750	50' (15420mm±100mm)
CC-710	10' (3048mm±50mm)		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.