



SC/APC-SC/APC SM DUPLEX 9/125 FIBER OPTICAL CABLE

SKUS	SCASCA03SD (3')	SCASCA33SD (33')
	SCASCA06SD (6')	SCASCA50SD (50')
	SCASCA10SD (10')	SCASCA65SD (65')
	SCASCA15SD (15')	SCASCA75SD (75')
	SCASCA25SD (25')	SCASCA100SD (100')

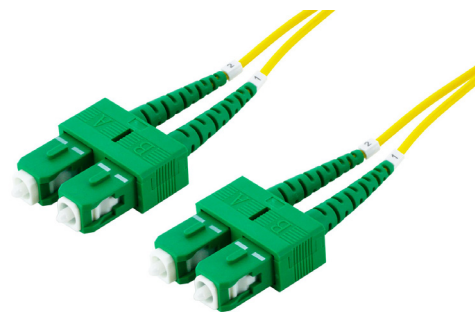

FEATURES

- SC/APC-SC/APC OM2 Single-Mode Duplex Cable 9/125μm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

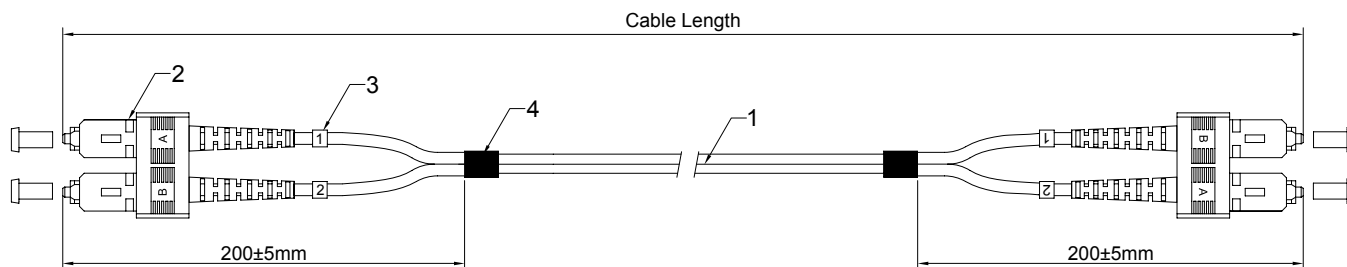

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Duplex Cable, PVC, Colour: Yellow
(2)	SC/APC SM 2.0mm Duplex Connector (Green Housing Green Boot)
(3)	Cable Marker
(4)	Black Shrinkage Tube

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB
A-B / B-A	


© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com


SC/APC-SC/APC SM SIMPLEX 9/125 FIBER OPTICAL CABLE

SKUS	SCASCA03SS	(3')	SCASCA33SS	(33')
	SCASCA06SS	(6')	SCASCA50SS	(50')
	SCASCA10SS	(10')	SCASCA65SS	(65')
	SCASCA15SS	(15')	SCASCA75SS	(75')
	SCASCA25SS	(25')	SCASCA100SS	(100')

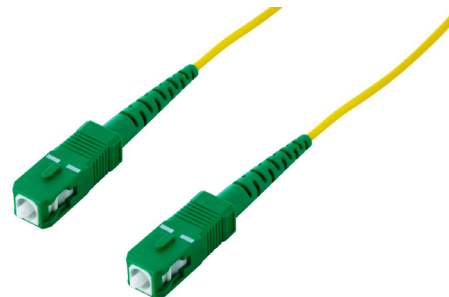

FEATURES

- SC/APC-SC/APC OM2 Single-Mode Simplex Cable 9/125μm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

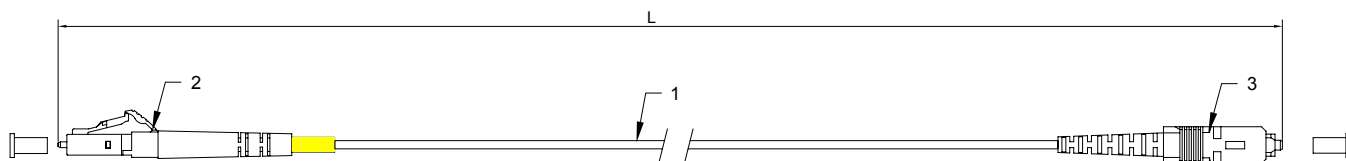

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Simplex Cable, PVC, Colour: Yellow
(2)	LC/UPC SM 2.0mm Simplex Connector (Blue Housing White Boot)
(3)	SC/APC SM 2.0mm Simplex Connector (Green Housing Green Boot)

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB (APC), ≥ 55 dB (UPC)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com