

CAT6 SINGLE UTP NETWORK PATCH CABLE 24AWG

SKUS	C6-005	(0.5')	C6-25	(25')
	C6-001	(1')	C6-030 *	(30')
	C6-01	(1.5')	C6-035 *	(35')
	C6-3	(3')	C6-040 *	(40')
	C6-5	(5')	C6-50	(50')
	C6-7	(7')	C6-75	(75')
	C6-10	(10')	C6-100	(100')
	C6-15	(15')	C6-150 *	(150')
	C6-020 *	(20')		

* Grey colour only



FEATURES



- Category 6 4-pair UTP 24AWG stranded copper network cable
- Use for voice, data, video distribution, and security applications
- Improved attenuation provides cleaner data and video transmissions compared to previous Cat5E standards
- Molded, snagless boot prevents unwanted cable snags during installation and provides extra strain relief
- Ethernet 1000 BASE-T; 100 BASE-T; 10 BASE-T (IEEE 802.3)
- Meets and/or Exceeds EIA/TIA 568 C.2-1
- 50 micron gold-plated RJ45 8P8C modular connector PVC Jacket
- FT4 rating for in-wall use
- Tested for applications up to 550 Mhz
- UL CM & CSA CMG Certification

AVAILABLE COLOURS



WIRE CONNECTION TABLE (T568B) :

P1		P2
1	WHITE ORANGE	1
2	ORANGE	2
3	WHITE GREEN	3
6	GREEN	6
5	WHITE BLUE	5
4	BLUE	4
7	WHITE BROWN	7
8	BROWN	8

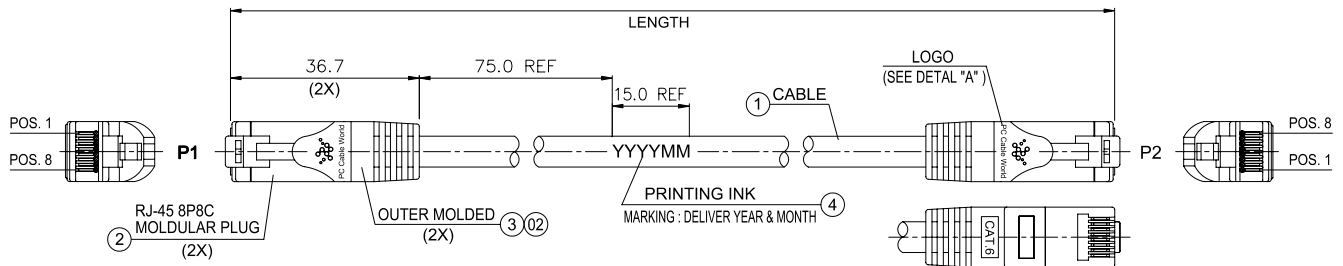

MATERIALS

CABLE (1)	Cat6 UTP LAN CABLE #24(7/0.20)*4P Jacket: PVC, OD=ø6.0±0.2
PLUG (2)	RJ-45 8P8C Modular Plug Contact: Copper alloy 50 Micro-inches, Gold plated Insulator: Polycarbonate, UL94V-2
OUTER MOLDED (3)	PVC, 75±5P
PRINTING INK (4)	Colour: White or Black

SPECIFICATIONS

MEETS C6 EIA/TIA 568 C.2-1 ROHS COMPLIANT			
INSULATION RESISTANCE: DC 300V, 10MΩ, 10MS Min.			
C6-005	0.5' (152mm±20mm)	C6-25	25' (7620mm±102mm)
C6-001	1' (305mm±20mm)	C6-030	30' (9144mm±102mm)
C6-01	1.5' (457mm±20mm)	C6-035	35' (10668mm±127mm)
C6-3	3' (914mm±25mm)	C6-040	40' (12192mm±127mm)
C6-5	5' (1524mm±38mm)	C6-50	50' (15240mm±152mm)
C6-7	7' (2134mm±38mm)	C6-75	75' (22860mm±203mm)
C6-10	10' (3048mm±51mm)	C6-100	100' (30480mm±254mm)
C6-15	15' (4572mm±51mm)	C6-150	150' (45720mm±305mm)
C6-020	20' (6096mm±51mm)		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.