


# CAT5E 1000' STRANDED UTP NETWORK BULK CABLE

**SKUS** PW-508

## FEATURES

- Category 5E UTP Stranded Copper Data Communications Cable 1000' 24 AWG
- Use in indoor installations for voice, data, video distribution, and security applications
- Stranded cabling provides greater bendability and flexibility when compared to solid copper core cabling
- Suitable for 350MHz Giga Speed data applications and Fast Ethernet
- Excellent attenuation and crosstalk characteristic
- 4-Pair identified colour-striped pairs
- Verified by ETL and 3P Third Party Tested to meet or exceed EIA/TIA 568 C.2, UL, CSA and ISO/IEC 11801 Cat5E specifications
- In-wall FT4/CMG rated
- RoHS compliant
- Supplied in easy to handle 1000' Reel Pull Boxes

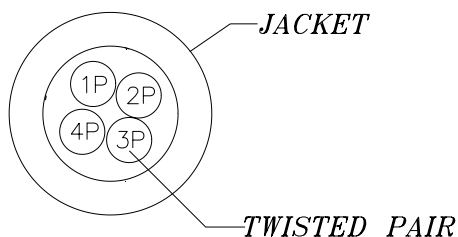

## CONSTRUCTION

<b>CONDUCTOR</b>	Stranded Bare Copper
<b>4 TWISTED PAIRS</b>	8C
<b>AWG</b>	24
<b>CONSTRUCTION (±0.008mm)</b>	7/0.20
<b>STRANDED DIA. (mm)</b>	0.60
<b>INSULATION</b>	HD PE
<b>NOM. THICKNESS (mm)</b>	0.18
<b>INSULATION DIA. (±0.05mm) 4 PAIRS CABLED TOGETHER.</b>	0.97
<b>JACKET</b>	PVC
<b>NOM. THICKNESS (mm)</b>	0.59
<b>OUTER DIA. (±0.2mm)</b>	5.5

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

[www.pccableworld.com](http://www.pccableworld.com)



## AVAILABLE COLOURS



## DESCRIPTION

<b>RATED TEMPERATURE</b>	75°C
<b>RATED VOLTAGE (V)</b>	-
<b>PRODUCT STANDARD CERTIFICATION</b>	UL CM & CSA CMG
<b>FLAME TEST</b>	FT4
<b>APPLICATION</b>	Telephone and other communication circuits such as voice, data, and audio for on-premise customer systems
<b>REFERENCE STANDARD</b>	UL 444

## COLOUR

<b>INSULATION CORES: PAIRS</b>	P1: Blue & White/Blue P2: Orange & White/Orange P3: Green & White/Green P4: Brown & White/Brown
------------------------------------	--

## PERFORMANCE

<b>ELECTRICAL CHARACTERISTICS (20°C)</b>	
<b>MAX. CONDUCTOR DC RESISTANCE (Ω/km)</b>	#24:89
<b>MIN. INSULATION RESISTANCE (Ω/m)</b>	HD PE:100M
<b>DIELECTRIC STRENGTH</b>	AC-500V/1 Min
<b>IMPEDANCE (Ω)</b>	100±15
<b>MECHANICAL CHARACTERISTICS</b>	
<b>TEST OBJECT / MATERIAL</b>	Jacket / PVC
<b>BEFORE TENSILE STRENGTH (kgf/mm)</b>	≥1.05