

# **HDMI 1.4 TO MICRO HDMI M/M CABLE**







SKUS

(10') (15') VC-674A VC-674L VC-674S VC-674E

VC-674G

**AVAILABLE COLOUR** 



### **FEATURES**

- HDMI 1.4 Type A Male to Type D Male High Speed with Ethernet Cable
- Use to connect your GoPro, camera, camcorder, or other Micro HDMI-equipped devices to a TV or projector with an HDMI port
- Support HDMI 1.4 functions including HDMI Ethernet channel, 3D video, 4K resolution, audio return channel, deeper color
- Support resolution up to 4K@60Hz
- Feature a high-speed data transfer rate up to 100 Mb/sec
- Gold-plated connectors for superior transmission, high reliability and durability

#### **SPECIFICATIONS**


ROHS COMPLIANT   CABLE LENGTH UNLESS OTHER SPEC. TOLERANCES:	
0 - 200mm	±10mm
201 - 1000mm	±20mm
1001 - 1500mm	±25mm
1501 - 2100 mm	±30mm
2100 mm -	±40mm


© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for a current specs. Please note that all physical specifications are nominal.



## **HDMI 1.4 TO MICRO HDMI M/M CABLE**

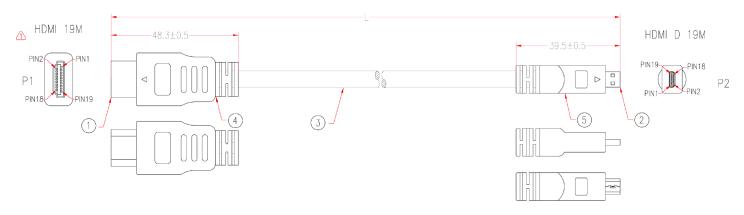



#### **MATERIALS**

- (1) HDMI 19 MALE 34AWG, Gold Plating 15u" on Contacts & Gold Connector, Black Insulator
- (2) HDMI 19 D MALE, Gold Plating 15u" on Contact & Gold Connector, Black Insulator
- (3) UL20276 [(34AWG\*1P+D+FAM)\*5Pcs+34AWG\*4C] +AEB HDMI 1.4, OD 5.0mm, Jacket Black

Molded PVC Black

Molded PE Colour Transparent

Molded PP Colour Transparent

(4) Copper Foil 33\*60mm

Black Heat Shrink Tube Ø0.8\*5mm

Black Heat Shrink Tube ø2.5\*4mm

	Molded PVC Black	
	Molded PE Colour Transparent	
	Molded PP Colour Transparent	
(5)	Copper Foil 17*50mm	
	Black Heat Shrink Tube ø0.8*5mm	
	Black Heat Shrink Tube ø2.5*4mm	

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for a current specs. Please note that all physical specifications are nominal.