



SC-SC/APC SM DUPLEX 9/125 FIBER OPTICAL CABLE

SKUS	SCSCA03SD (3')	SCSCA33SD (33')
	SCSCA06SD (6')	SCSCA50SD (50')
	SCSCA10SD (10')	SCSCA65SD (65')
	SCSCA15SD (15')	SCSCA75SD (75')
	SCSCA25SD (25')	SCSCA100SD (100')

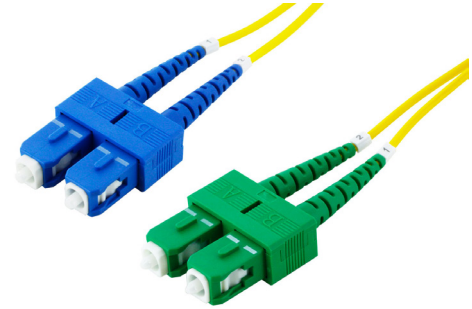

FEATURES

- SC/UPC-SC/APC OS2 Single-Mode Duplex Cable 9/125µm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

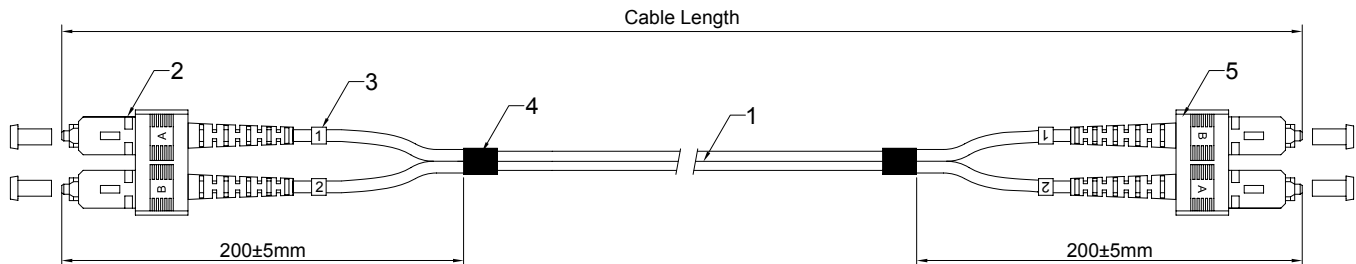

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Duplex Cable, PVC, Colour: Yellow
(2)	SC/UPC SM 2.0mm Duplex Connector (Blue Housing Blue Boot)
(3)	Cable Marker
(4)	Black Shrinkage Tube
(5)	SC/APC SM 2.0mm Duplex Connector (Green Housing Green Boot)

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB (APC), ≥ 55 dB (UPC)
A-B / B-A	


© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com


SC-SC/APC SM SIMPLEX 9/125 FIBER OPTICAL CABLE

SKUS	SCSCA03SS (3')	SCSCA33SS (33')
	SCSCA06SS (6')	SCSCA50SS (50')
	SCSCA10SS (10')	SCSCA65SS (65')
	SCSCA15SS (15')	SCSCA75SS (75')
	SCSCA25SS (25')	SCSCA100SS (100')

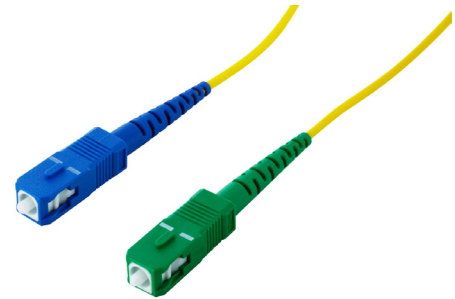

FEATURES

- SC/UPC-SC/APC OS2 Single-Mode Simplex Cable 9/125µm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications.
- Ideal solution for long-range networking.
- UL listed and OFNR (riser) rated.
- Suitable for use in upright shafts between building floors.
- Compliant with ITU-T standard G657A1.
- Features a standard SMF yellow jacket and Corning core.
- Each cable is individually packed in a zip bag for convenience.

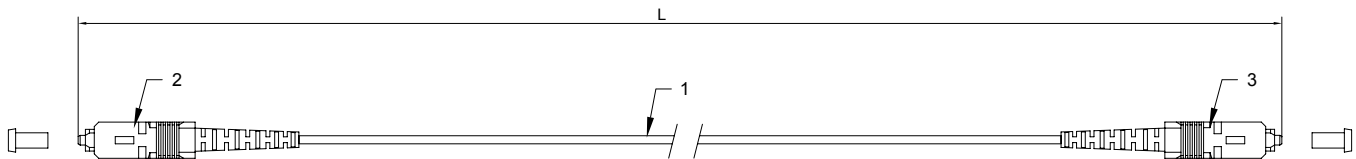

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Simplex Cable, PVC, Colour: Yellow
(2)	SC/UPC SM 2.0mm Simplex Connector (Blue Housing Blue Boot)
(3)	SC/APC SM 2.0mm Simplex Connector (Green Housing Green Boot)

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB (APC), ≥ 55 dB (UPC)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.