


CAT6A SINGLE UTP NETWORK PATCH CABLE 26AWG

SKUS	C6-A005	(0.5')	C6-A15	(15')
	C6-A001	(1')	C6-A25	(25')
	C6-A01	(1.5')	C6-A35	(35')
	C6-A03	(3')	C6-A50	(50')
	C6-A05	(5')	C6-A75	(75')
	C6-A07	(7')	C6-A100	(100')
	C6-A10	(10')		

FEATURES

- Category 6A 4-Pair UTP Stranded Copper Network Cable 26 AWG
- Use for voice, data, video distribution, and security applications
- Improved attenuation provides cleaner data and video transmissions compared to previous Cat6 standards
- Molded, snag-less boot prevents unwanted cable snags during installation and provides extra strain relief
- Ethernet 1000 BASE-T; 100 BASE-TX; 1000 BASE-T, 10G BASE-T (IEEE 802.3)
- Meets and/or Exceeds EIA/TIA 568 C.2-1
- 50 micron gold-plated copper alloy contact, RJ45 8P8C modular plug
- FT4 rating for in-wall use
- UL CM & CSA CMG Certification
- Tested for applications up to 500MHz bandwidth

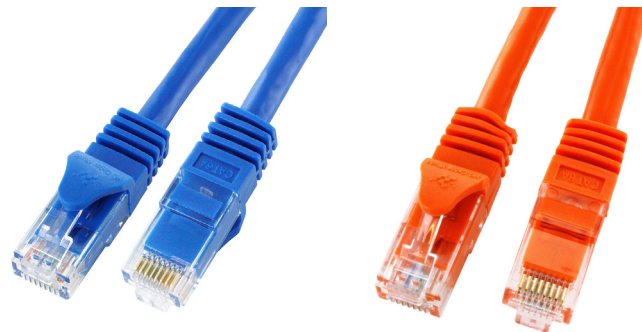


AVAILABLE COLOURS



Pin Assignment:

Pos. No.	T568B WIRING (PC TO HUB)	Pos. No.
1	Orange	1
2	White/Orange	2
3	Green	3
6	White/Green	6
4	White/Blue	4
5	Blue	5
7	Brown	7
8	White/Brown	8

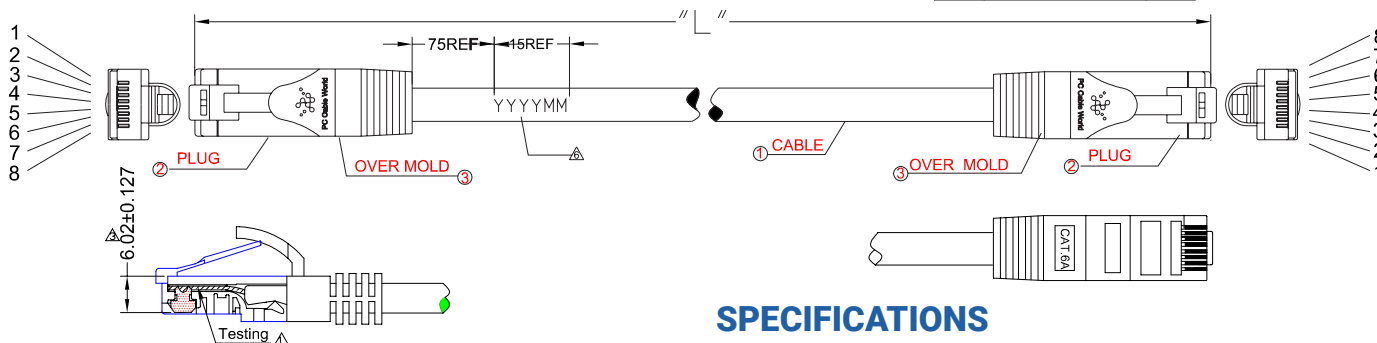

MATERIALS

CABLE (1)	Cat6A F/UTP 26AWG(7/0.16)*4P+AE Cable to plug Tensile strength > 7 kg
JACKET	PVC (OD 6.0 ± 0.2 mm), CMG/FT4
PLUG (2)	RJ-45 8P8C Modular plug, Loading bar Plug Contact: Copper alloy 50u", Gold plated Insulator: Polycarbonate, UL94V-2
OVER MOLD (3)	PVC, 75P

SPECIFICATIONS

MEETS C6A EIA/TIA 568 C.2-1 | ROHS COMPLIANT

SKUS	LENGTH	SKUS	LENGTH
C6-A005	0.5' (152mm±20mm)	C6-A10	10' (3048mm±50mm)
C6-A001	1' (305mm±20mm)	C6-A15	15' (4572mm±50mm)
C6-A01	1.5' (457mm±20mm)	C6-A25	25' (7620mm±50mm)
C6-A02	2' (610mm±20mm)	C6-A35	35' (10668mm±100mm)
C6-A03	3' (914mm±20mm)	C6-A50	50' (15240mm±150mm)
C6-A05	5' (1524mm±30mm)	C6-A75	75' (22860mm±150mm)
C6-A07	7' (2134mm±30mm)	C6-A100	100' (30480mm±150mm)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com