



# LC-SC/APC SM SIMPLEX 9/125 FIBER OPTICAL CABLE

SKUS	LCSCA03SS (3')	LCSCA33SS (33')
	LCSCA06SS (6')	LCSCA50SS (50')
	LCSCA10SS (10')	LCSCA65SS (65')
	LCSCA15SS (15')	LCSCA75SS (75')
	LCSCA25SS (25')	LCSCA100SS (100')

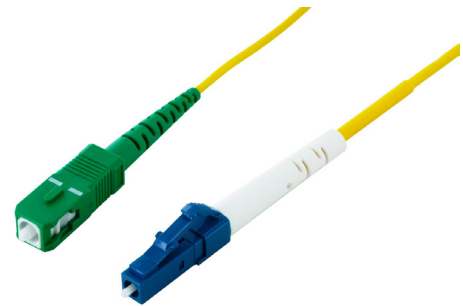

## FEATURES

- LC/UPC-SC/APC OM2 Single-Mode Simplex Cable 9/125µm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

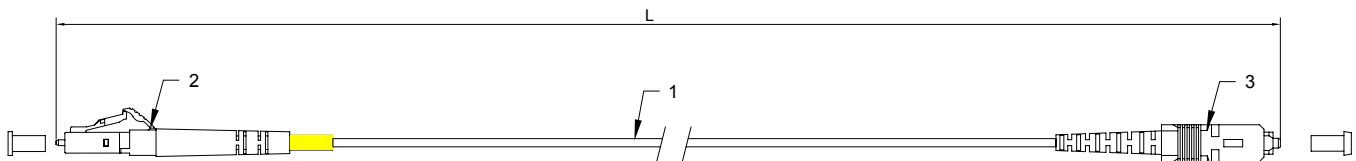

## MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Simplex Cable, PVC, <b>Colour:</b> Yellow
(2)	LC/UPC SM 2.0mm Simplex Connector (Blue Housing White Boot)
(3)	SC/APC SM 2.0mm Simplex Connector (Green Housing Green Boot)

## CABLE LENGTH AND TOLERANCE

<b>CABLE LENGTH&lt;1M</b>	5cm
<b>1M≤CABLE LENGTH&lt;15M</b>	10cm
<b>15M≤CABLE LENGTH&lt;30M</b>	15cm
<b>CABLE LENGTH≥30M</b>	Cable Length*1%

## SPECIFICATIONS

<b>INSERTION LOSS</b>	≤ 0.3 dB
<b>RETURN LOSS</b>	≥ 60 dB (APC), ≥ 55 dB (UPC)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

[www.pccableworld.com](http://www.pccableworld.com)