

CAT6A SINGLE UTP NETWORK PATCH CABLE 26AWG

| | | | | |
|-------------|-----------|--------|-----------|--------|
| SKUS | C6A-001BL | (1') | C6A-15BL | (15') |
| | C6A-01BL | (1.5') | C6A-25BL | (25') |
| | C6A-03BL | (3') | C6A-50BL | (50') |
| | C6A-05BL | (5') | C6A-75BL | (75') |
| | C6A-07BL | (7') | C6A-100BL | (100') |
| | C6A-10BL | (10') | | |



FEATURES


- Category 6A 4-Pair UTP Blue Stranded Copper Network Cable 26 AWG
- Use for voice, data, video distribution, and security applications
- Improved attenuation provides cleaner data and video transmissions compared to previous Cat6 standards
- Molded, snag-less boot prevents unwanted cable snags during installation and provides extra strain relief
- Ethernet 1000 BASE-T; 100 BASE-TX; 1000 BASE-T, 10G BASE-T (IEEE 802.3)
- Meets and/or Exceeds EIA/TIA 568 C.2-1
- 50 micron gold-plated copper alloy contact, RJ45 8P8C modular plug
- FT4 rating for in-wall use
- UL CM & CSA CMG Certification
- Tested for applications up to 500MHz bandwidth

AVAILABLE COLOUR



Pin Assignment:

| Pos. No. | T568B WIRING (PC TO HUB) | Pos. No. |
|----------|--------------------------|----------|
| 1 | Orange | 1 |
| 2 | White/Orange | 2 |
| 3 | Green | 3 |
| 6 | White/Green | 6 |
| 4 | White/Blue | 4 |
| 5 | Blue | 5 |
| 7 | Brown | 7 |
| 8 | White/Brown | 8 |

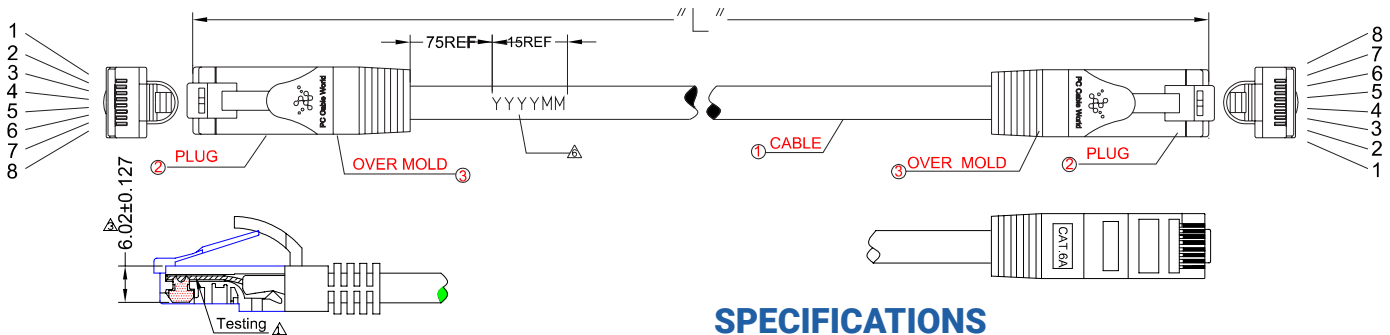

MATERIALS

| | |
|----------------------|---|
| CABLE (1) | Cat6A F/UTP 26AWG(7/0.16)*4P+AE |
| JACKET | PVC (OD 6.0 ± 0.2 mm), CMG/FT4 |
| PLUG (2) | RJ-45 8P8C Modular plug Contact: Copper alloy 50u", Gold plated Insulator: Polycarbonate, UL94V-2 Loading bar Plug |
| OVER MOLD (3) | PVC, 75P Colour: Blue |

SPECIFICATIONS

MEETS C6A EIA/TIA 568 C.2-1 | ROHS COMPLIANT

| SKUS | LENGTH | SKUS | LENGTH |
|-----------|-------------------|-----------|----------------------|
| C6A-001BL | 1' (305mm±20mm) | C6A-10BL | 10' (3048mm±50mm) |
| C6A-01BL | 1.5' (457mm±20mm) | C6A-15BL | 15' (4572mm±50mm) |
| C6A-02BL | 2' (610mm±20mm) | C6A-25BL | 25' (7620mm±50mm) |
| C6A-03BL | 3' (914mm±20mm) | C6A-50BL | 50' (15240mm±150mm) |
| C6A-05BL | 5' (1524mm±30mm) | C6A-75BL | 75' (22860mm±150mm) |
| C6A-07BL | 7' (2134mm±30mm) | C6A-100BL | 100' (30480mm±150mm) |

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.