


1000' RJ11-4C SILVER PHONE WIRE

SKUS PW-444A

FEATURES

- 1000' RJ11 4 Conductor Flat Modular Phone Wire, 26AWG
- Use for Telephony, VoIP Telephony, or other Voice and Data Applications, usually used in cases with a single telephone line to create a bridged connection
- Stranded copper core conductors provides flexibility

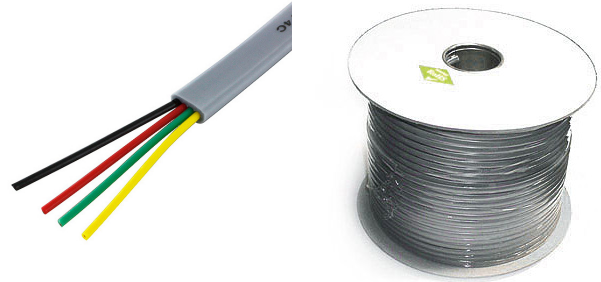


DESCRIPTION

RATED VOLTAGE (V)	UL 150V& CSA 300V
RATED TEMPERATURE	60°C
PRODUCT STANDARD CERTIFICATION	UL 20251 & CSA AWM II A/B
FLAME TEST	VW-1 & FT1
APPLICATION	Internal cable of electronic equipment, or as Handset Wire or Telephone Cord for Subscriber Sets
REFERENCE STANDARD	UL 758

CONSTRUCTION

CONDUCTOR	Stranded Bare Copper
COMPONENT	4C
AWG	26
CONSTRUCTION (mm)	7/0.16
STRANDED DIA. (mm)	0.48
INSULATION	PP
NOM. THICKNESS (mm)	0.23
INSULATION DIA. (±0.05mm) FLAT EXTRUDED.	0.95
JACKET	PVC
NOM. THICKNESS (mm)	0.55
OUTER DIA. (mm)	(2.5±0.1) x (5.0±0.2)

AVAILABLE COLOUR

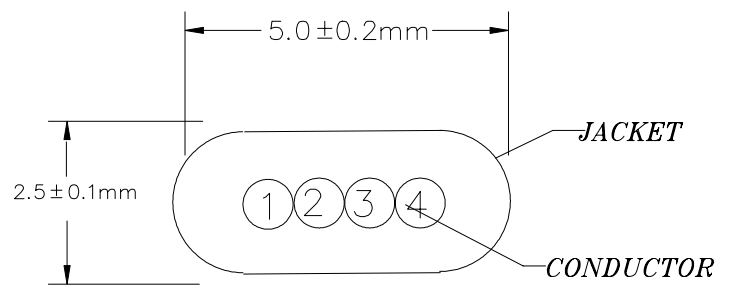

COLOUR

INSULATED CONTACTS	1.Black 2.Red 3.Green 4.Yellow
JACKET	Silver (KB5K)

PERFORMANCE

ELECTRICAL CHARACTERISTICS (20°C)	
MAX. CONDUCTOR DC RESISTANCE (Ω/km)	#26:142
MIN. INSULATION RESISTANCE (Ω/m)	PP:100M
DIELECTRIC STRENGTH	AC-500V/1 Min
MECHANICAL CHARACTERISTICS	
TEST OBJECT	Jacket
TEST MATERIAL	PVC
BEFORE TENSILE STRENGTH (kg/mm²)	≥1.05

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com