



LC/APC-LC/APC SM DUPLEX 9/125 FIBER OPTICAL CABLE

SKUS	LCALCA03SD	(3')	LCALCA33SD	(33')
	LCALCA06SD	(6')	LCALCA50SD	(50')
	LCALCA10SD	(10')	LCALCA65SD	(65')
	LCALCA15SD	(15')	LCALCA75SD	(75')
	LCALCA25SD	(25')	LCALCA100SD	(100')

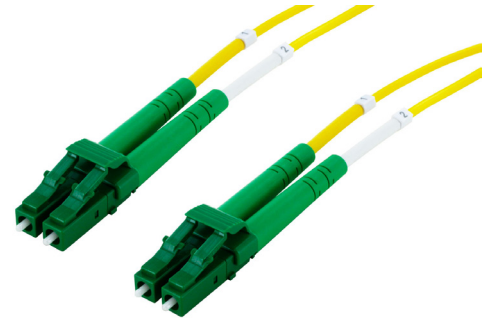

FEATURES

- LC/APC-LC/APC OS2 Single-Mode Duplex Cable 9/125µm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

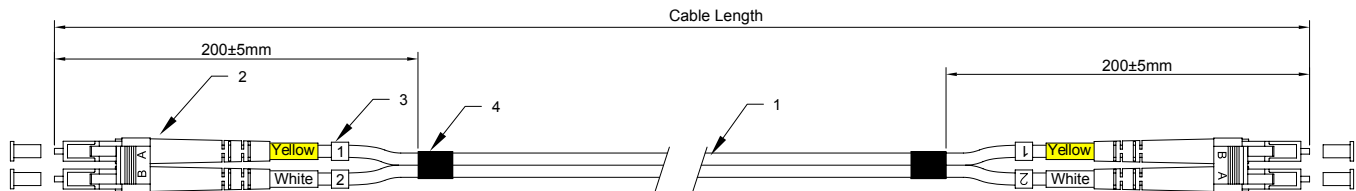

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Duplex Cable, PVC, Colour: Yellow
(2)	LC/APC SM 2.0mm Duplex Connector (Green Housing Green Boot)
(3)	Cable Marker
(4)	Black Shrinkage Tube

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB
A-B / B-A	

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.


LC/APC-LC/APC SM SIMPLEX 9/125 FIBER OPTICAL CABLE

SKUS	LCALCA03SS	(3')	LCALCA33SS	(33')
	LCALCA06SS	(6')	LCALCA50SS	(50')
	LCALCA10SS	(10')	LCALCA65SS	(65')
	LCALCA15SS	(15')	LCALCA75SS	(75')
	LCALCA25SS	(25')	LCALCA100SS	(100')



FEATURES

- LC/APC-LC/APC OS2 Single-Mode Simplex Cable 9/125µm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

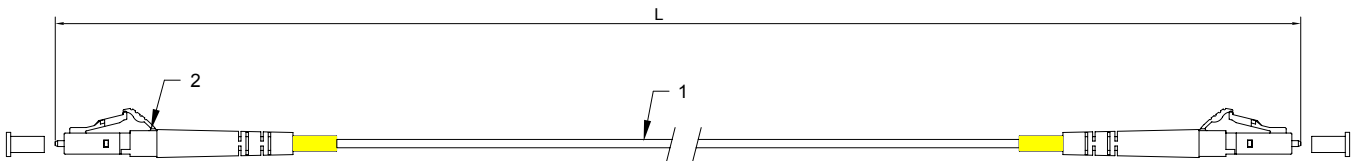

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Simplex Cable, PVC, Colour: Yellow
(2)	LC/APC SM 2.0mm Simplex Connector (Green Housing Green Boot)

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.