


## Multi-mode 62.5/125 Optical Fiber 2mm

### Construction Detail

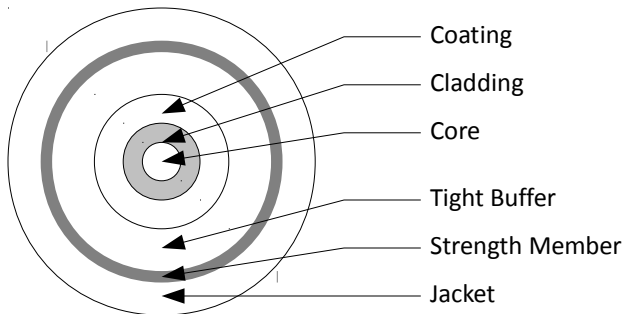

### Description

For optical fiber transmission

Rated Temperature (°C)	-20 to +60
Flame Test	OFNR
Product Compliance	RoHS

### Physical Construction

<b>Inner Optical Fiber</b>	Corning Glass
Core Dia. ( $\pm 2.5\mu\text{m}$ )	62.5
Cladding Dia. ( $\pm 2.0\mu\text{m}$ )	125
Coating Dia. ( $\pm 5\mu\text{m}$ )	245

Core-Cladding concentricity ( $\mu\text{m}$ )	$\leq 1.5$
Cladding non-circularity (%)	$\leq 1.0$
Coating-Cladding concentricity ( $\mu\text{m}$ )	$\leq 12$

#### Outer Optical Cable

<b>Tight Buffer</b>	PVC
Outer Dia. (mm)	0.9
<b>Strength Member</b>	Aramid (Kevlar)
<b>Jacket</b>	PVC
Outer Dia. (mm)	2.0

### Colours

<b>Jacket</b>	Orange
<b>Sheath</b>	White

### Performance Characteristics

#### Typical Optical

Insertion Loss (dB)	$\leq 0.3$
Return Loss (dB)	$\geq 45$
Fiber Attenuation (dB/km@1300nm)	$\leq 0.7$
Fiber Attenuation (dB/km@850nm)	$\leq 3.0$
Cable Attenuation (dB/km@1300nm)	$\leq 1.5$
Cable Attenuation (dB/km@850nm)	$\leq 3.5$

#### Mechanical

Tensile Strength, Long-Term (N)	60
Tensile Strength, Short-Term (N)	100
Crush Resistance, Long-Term (N/100mm)	100
Crush Resistance, Short-Term (N/100mm)	500
Bend Radius, Dynamic (mm)	20xD
Bend Radius, Static (mm)	10xD
	(D: Cable Diameter)

#### Performance

Bandwidth (MHz.KM@850nm)	$\geq 160$
Bandwidth (MHz.KM@1300nm)	$\geq 500$

### Jacket Marking (black)

CORNING OPTICAL FIBER [MM]/[YYYY] MM 62.5/125um OF (UL)E247906 XXXXX M

Where:

[MM] - Month  
 [YYYY] - Year  
 XXXXX - Length in spool