


Construction Detail

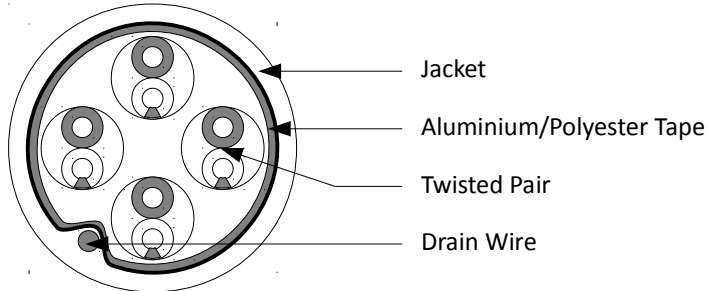

Description

Enhanced 350MHz high-performance cable for bandwidth intensive applications

Applications	Voice, data, video distribution, security
Ethernet	10BASE-T, 100BASE-TX, 1000BASE-T
Rated Temperature (°C)	75
Product Standard Certification	UL CM & CSA CMG
Flame Test	FT4
Reference Standard	UL 444

Performance Characteristics

Electrical (20°C)

Min. Insulation Resistance (Ω-km)	100M
Max. Conductor DC Resistance (Ω/km)	142
Dielectric Strength (AC V/1 Min)	500

Mechanical

Jacket	PVC
Before Tensile Strength (kgf/mm ²)	≥1.05

Twisted Pair & Insulation Colours

P1	Blue	&	White/Blue
P2	Orange	&	White/Orange
P3	Green	&	White/Green
P4	Brown	&	White/Brown

Physical Construction

Conductor	4 pairs stranded copper
Size (AWG)	26
Construction (±0.008mm)	7/0.16
Stranded Dia. (mm)	0.48
Insulation	HD PE
Average Thickness (mm)	0.21
Insulation dia. (±0.05mm)	0.90
Shield	Aluminium/Polyester
Coverage (%)	≥125%
Drain Wire	Stranded Tinned Copper
Strand Dia. (#)/(±0.008mm)	7/0.16T
Jacket	PVC
Average Thickness (mm)	0.6
Outer Dia. (±0.2mm)	5.6

Jacket Marking

Legend: **[WXYZ]FT** => Length in Spool (e.g., 0100ft)
[SPACE] => Three spaces

E132276-A (UL) CM 75°C 4PR 26AWG **[SPACE]**
 CSA LL64151-A CMG 75°C FT4 **[SPACE]**
 ETL VERIFIED TO ANSI/TIA-568-C.2 CAT.5E PATCH CABLE
 - - - STP RoHS **[WXYZ]FT** TESTED TO 350MHz