

# POWER BAR 8 OUTLET 6' 360 PLUG 2160J SURGE/EMI/RFI BLACK

**SKUS** MM-013


## FEATURES

- Power Surge Block, 8 Outlet, 360 6' Flat Plug, 2160J SURGE/EMI/RFI
- Use to plug multiple electrical devices into a single AC wall socket
- 8 grounded outlets with 3-line (X3 MOV) surge protection
- 3 transformer spaced outlets
- 2 protected phone / fax / modem jacks
- Green grounding LED lights to indicate proper wiring
- Red LED indicates active surge protection
- Safely shuts down to prevent fires in the case of extended over-voltage or when surge protection expires
- Power ON/OFF rocker switch with integrated 15-amp overload resettable circuit breaker
- Integrated high-frequency capacitor and choke coils reduce AC line noise interference
- Audible buzzer alarm sounds when internal surge protection fails
- Features 360 degree rotating flat plug
- Mounting slots on back of unit
- Tech specs; Plug type NEMA 5-15P, Outlet type NEMA 5-15R, Cord length 6', Electrical rating 15A, 120V, 60Hz, 1800 Watts, L-N, L-G, N-G 3-line surge protection, 2160 Joule surge energy rating, EMI/RFI noise filters 150KHz~100MHz attenuation up to 58 dB, max spike current 144,000 amps, max spike voltage 6KV, response time < 1 nanosecond, modem protection 160J
- Fireproof
- UL Listed to U.S. and Canadian Safety Standards: UL 1449, UL 1363
- RoHS compliant
- 6ft 150v 26 AWG RJ11 6P2C silver phone wire included



## SPECIFICATIONS

**ROHS COMPLIANT | UL, CUL LISTED**

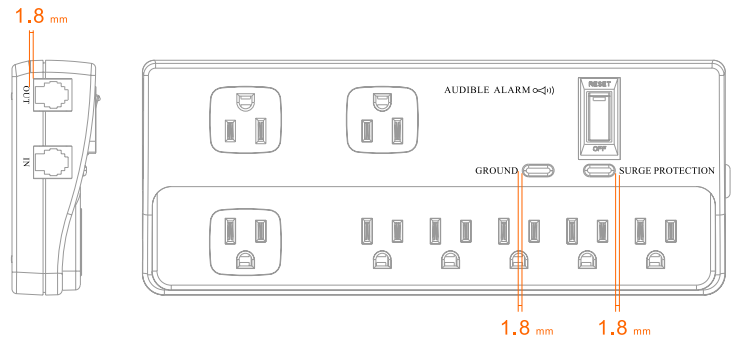

### TOP COVER & BOTTOM COVER

**Colour:** PANTONE Black C  
**Finish:** MT-1055-2

**SWITCH**  
**Colour:** Red

**POWER CORD**  
**Colour:** Black  
**Finish:** Glossy

**LED LENS**  
**Colour:** Transparent Green  
**Finish:** Glossy

**LED LENS**  
**Colour:** Transparent Red  
**Finish:** Glossy

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.