



LC-LC/APC SM DUPLEX 9/125 FIBER OPTICAL CABLE

SKUS	LCLCA03SD (3')	LCLCA33SD (33')
	LCLCA06SD (6')	LCLCA50SD (50')
	LCLCA10SD (10')	LCLCA65SD (65')
	LCLCA15SD (15')	LCLCA75SD (75')
	LCLCA25SD (25')	LCLCA100SD (100')

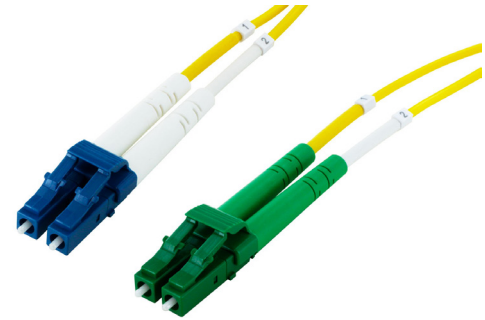

FEATURES

- LC/UPC-LC/APC OM2 Single-Mode Duplex Cable 9/125μm
- Perfect for fast Ethernet, gigabit Ethernet, and other data applications
- Ideal solution for long-range networking
- UL listed and OFNR (riser) rated
- Suitable for use in upright shafts between building floors
- Compliant with ITU-T standard G657A1
- Features a standard SMF yellow jacket and Corning core
- Each cable is individually packed in a zip bag for convenience

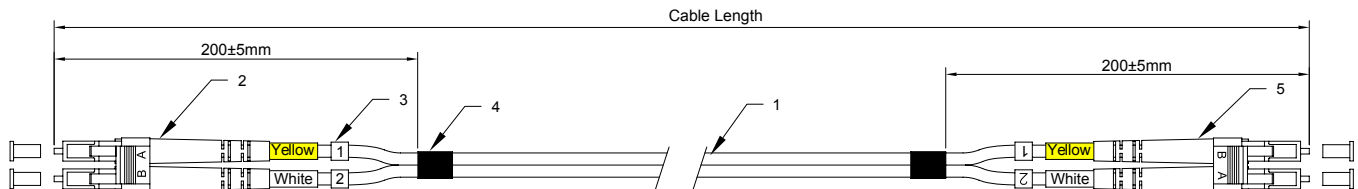

MATERIALS

(1)	OD: 2.0mm, Singlemode 9/125 G657A1, Corning Fiber, Duplex Cable, PVC, Colour: Yellow
(2)	LC/UPC SM 2.0mm Duplex Connector (Blue Housing White Boot)
(3)	Cable Marker
(4)	Black Shrinkage Tube
(5)	LC/APC SM 2.0mm Duplex Connector (Green Housing Green Boot)

CABLE LENGTH AND TOLERANCE

CABLE LENGTH<1M	5cm
1M≤CABLE LENGTH<15M	10cm
15M≤CABLE LENGTH<30M	15cm
CABLE LENGTH≥30M	Cable Length*1%

SPECIFICATIONS

INSERTION LOSS	≤ 0.3 dB
RETURN LOSS	≥ 60 dB (APC), ≥ 55 dB (UPC)
A-B / B-A	

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.