


# CAT6A SLIM UTP NETWORK PATCH CABLE (28AWG)

## SKUS

C6A-S005BL	(0.5')	C6A-S07BL	(7')
C6A-S001BL	(1')	C6A-S10BL	(10')
C6A-S02BL	(2')	C6A-S15BL	(15')
C6A-S03BL	(3')	C6A-S20BL	(20')
C6A-S05BL	(5')	C6A-S25BL	(25')

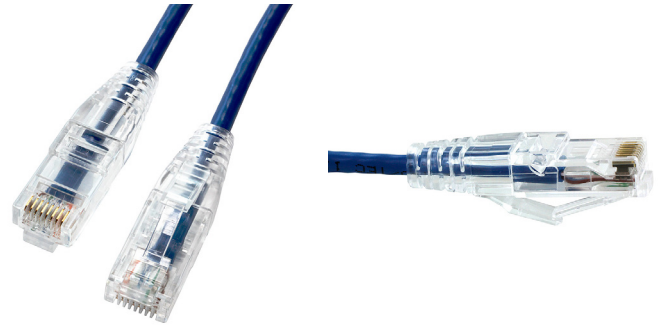


## FEATURES

- High performance slim Cat6A 28 AWG Ethernet patch cable is designed for high density environments
- Improve airflow and cable management in tight spaces
- 60% thinner than standard 24 AWG Cat6A cables
- RJ45 connectors with 50-micron gold-plated contacts ensure clear transmission by eliminating signal loss due to corrosion
- Snag-less translucent clear boot is designed to protect the locking tab of the RJ45 connector when plugging and unplugging
- 100% bare copper wires are compliant with EIA/TIA standards by UL and ETL
- RoHS compliant

## AVAILABLE COLOUR



8806-9	
P1	P2
1	1 WHITE/ORANGE
2	2 ORANGE
3	3 WHITE/GREEN
6	6 GREEN
4	4 BLUE
5	5 WHITE/BLUE
7	7 WHITE/BROWN
8	8 BROWN

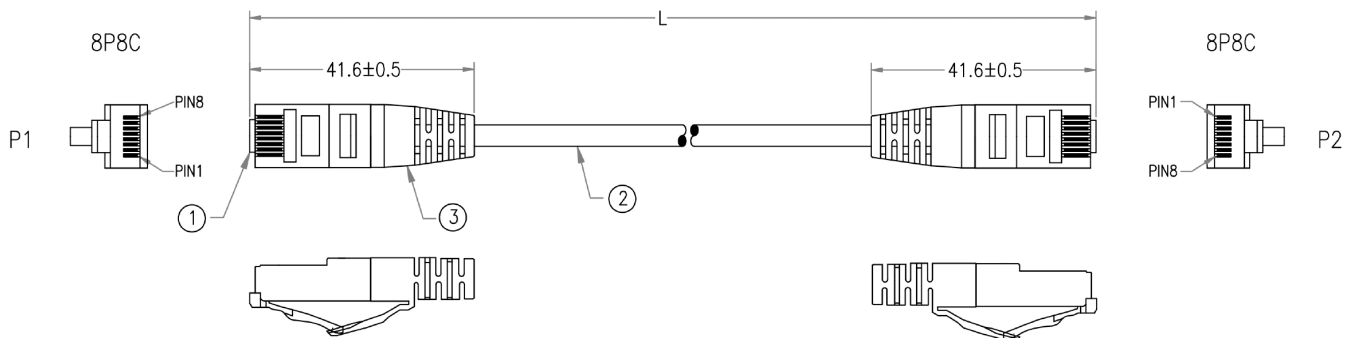

## MATERIALS

<b>JACK (1)</b>	8P8C Modular plug, gold plating 50 Micro-inches on contacts
<b>CABLE (2)</b>	4 Twisted pairs mini Cat.6A 28AWG UTP, OD 4.0mm, Jacket blue (UH-4)
<b>BOOT (3)</b>	8P8C Transparent Boot (OD 4.5mm)

## SPECIFICATIONS

**MEETS C6A EIA/TIA 568A/B STANDARD | ROHS COMPLIANT**

**CABLE LENGTH UNLESS OTHER SPEC. TOLERANCES**

0 - 200mm	± 10mm
201 - 1000mm	± 20mm
1001 - 1500mm	± 25mm
1501 - 2100mm	± 30mm
> 2100mm	± 40mm

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for a current specs. Please note that all physical specifications are nominal.

[www.pccableworld.com](http://www.pccableworld.com)